


SUPER SLIM LED DOWNLIGHT

| ITEM No. | LED Power | Luminous Flux | Input Voltage | Beam Angle | IP Rate | Lamp Size | Cutout |
|--------------------|-----------|---------------|---------------|------------|---------|-----------|--------|
| ZR-C3003-12W-3000K | | 1200LM | AC85-265V | 38° | 20 | ø60×118mm | ø20mm |
| ZR-C3003-12W-6000K | | 1200LM | AC85-265V | 38° | 20 | ø60×118mm | ø20mm |
| ZR-C3003-15W-3000K | | 1500LM | AC85-265V | 38° | 20 | ø60×218mm | ø20mm |
| ZR-C3003-15W-6000K | | 1500LM | AC85-265V | 38° | 20 | ø60×218mm | ø20mm |

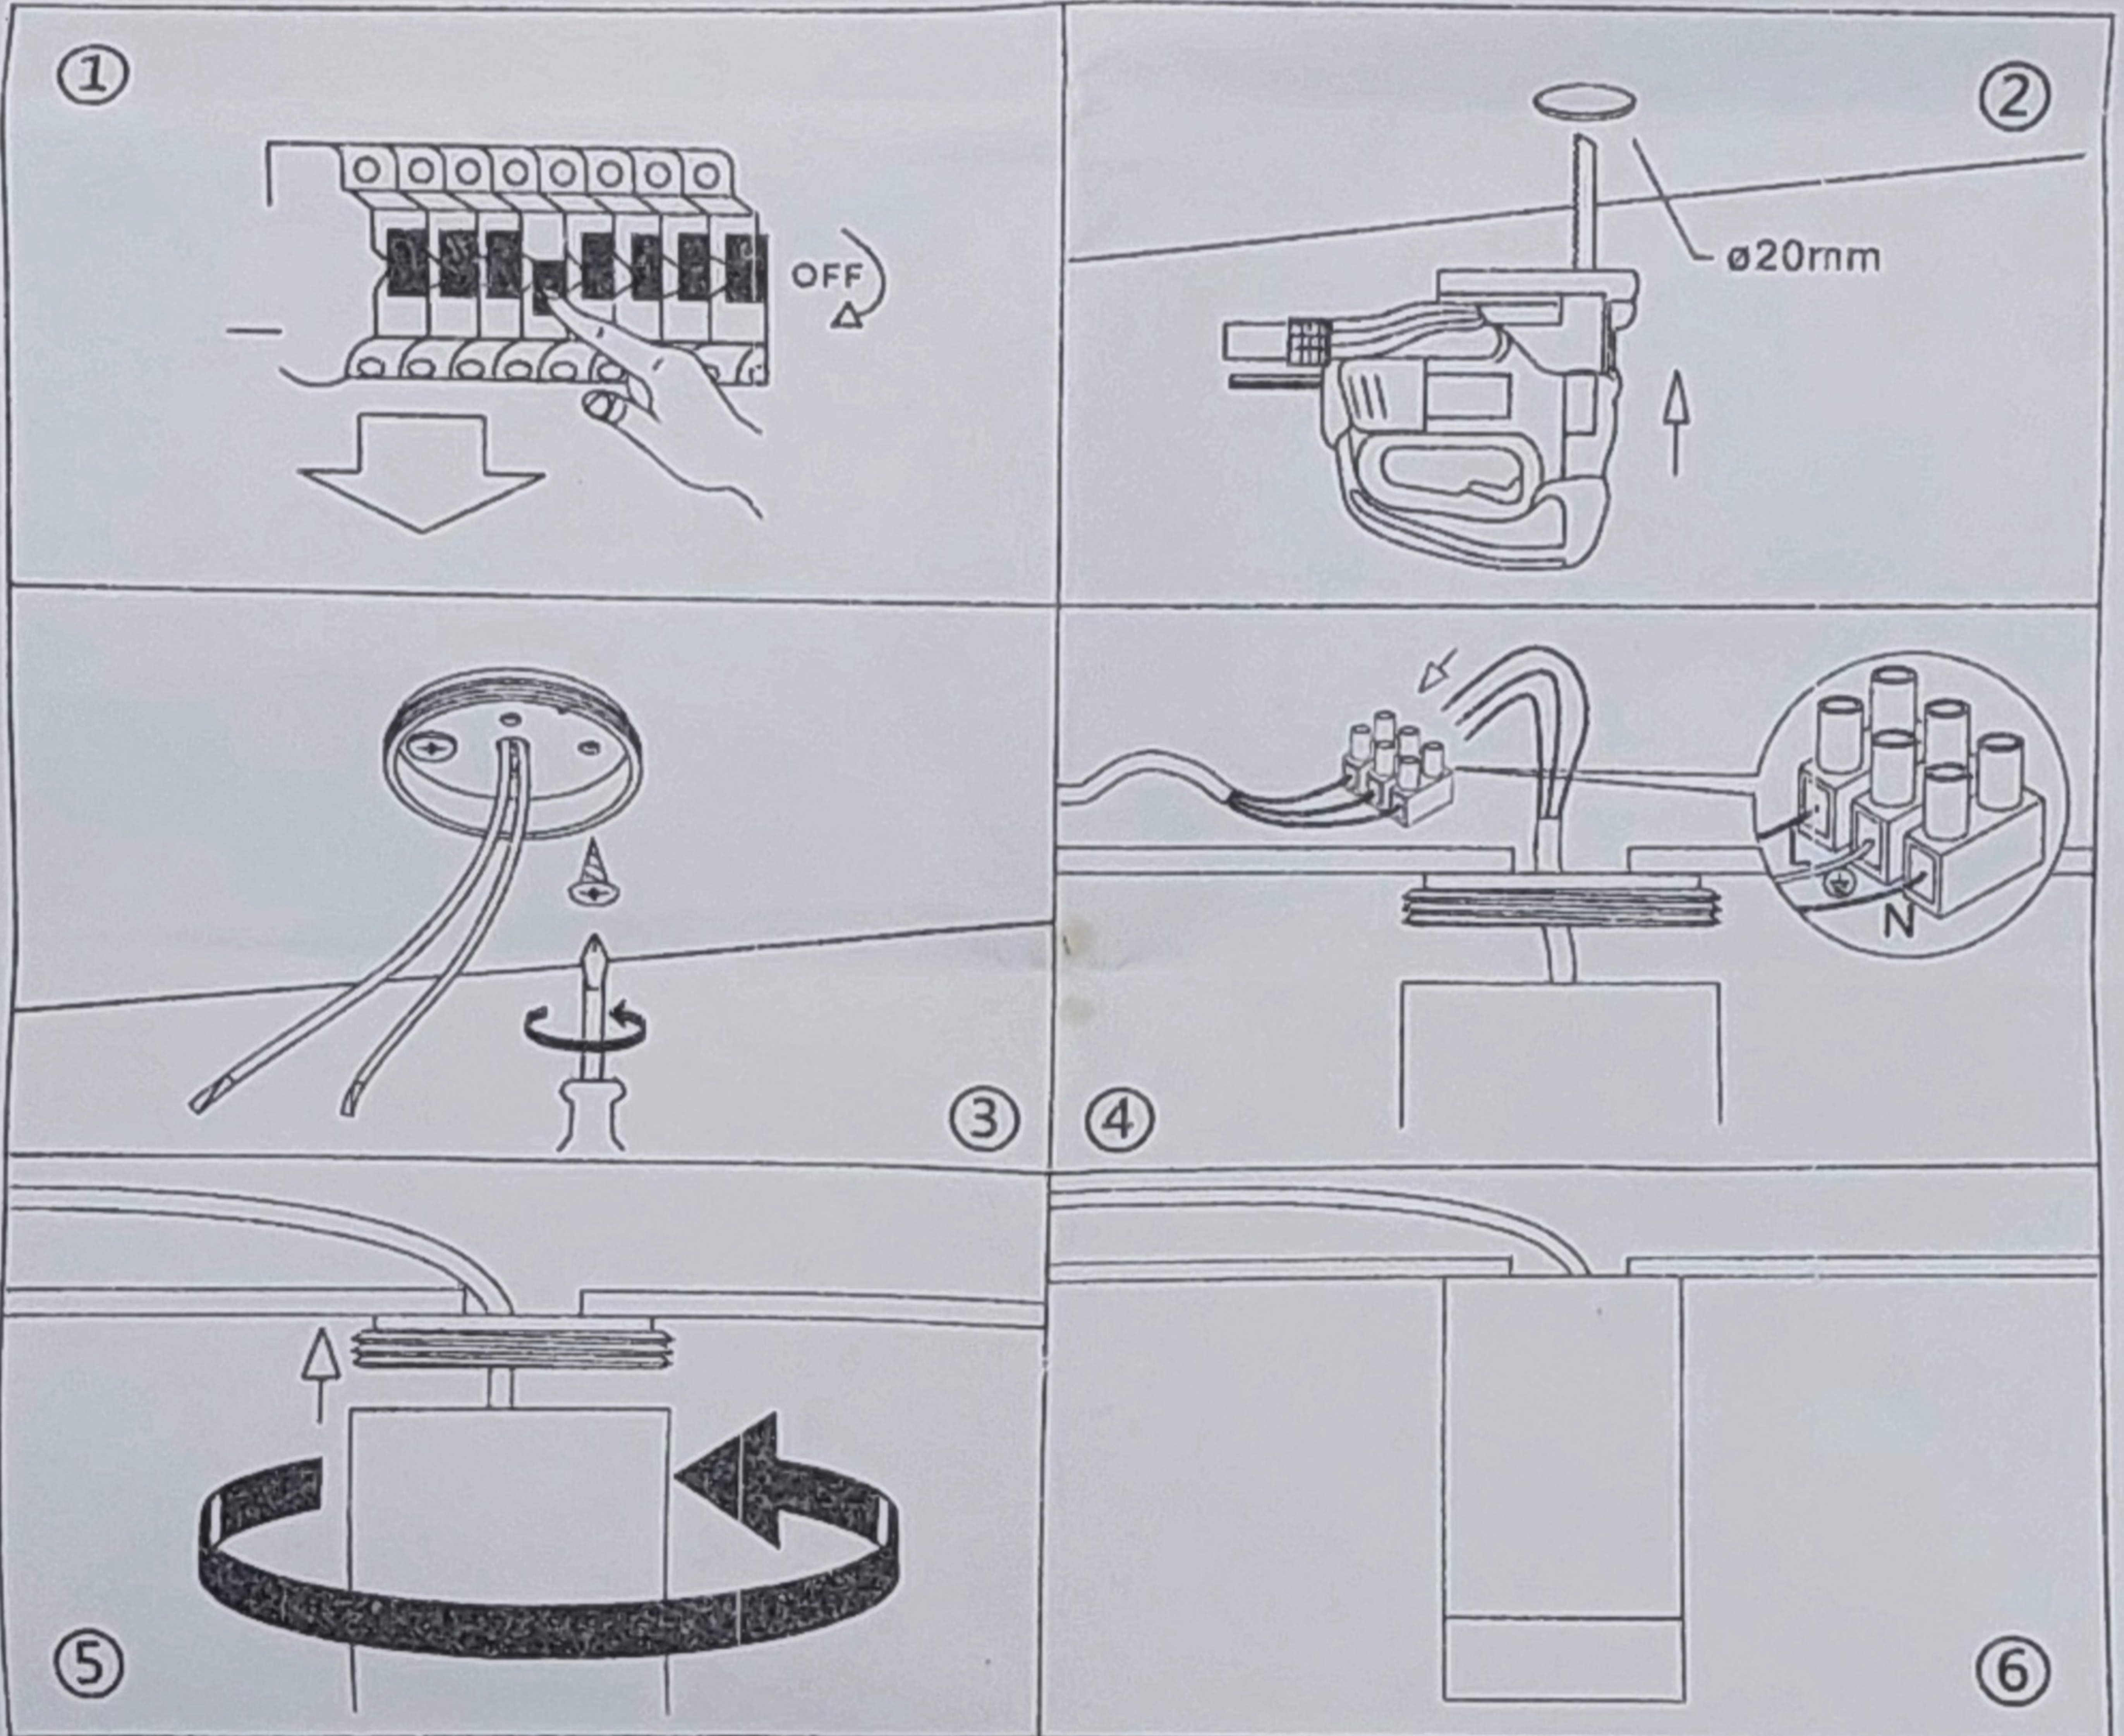

WARNING!

1. Cut off power before installation.
2. Can not be used as emergency light.
3. Nothing should cover the product.
4. The environment temperature of the lamp operation is -10°C to +40°C.

