






SUPER SLIM LED DOWNLIGHT

ITEM No.	LED Power	Luminous Flux	Input Voltage	Beam Angle	IP Rate	Lamp Size	Cutout
ZR-C3008-12W-3000K		1200LM	AC85-265V	30°	20	73×73×95mm	ø20mm
ZR-C3008-12W-6000K		1200LM	AC85-265V	30°	20	73×73×95mm	ø20mm
ZR-C3008-30W-3000K		3000LM	AC85-265V	30°	20	115×115×125mm	ø20mm
ZR-C3008-30W-6000K		3000LM	AC85-265V	30°	20	115×115×125mm	ø20mm


①

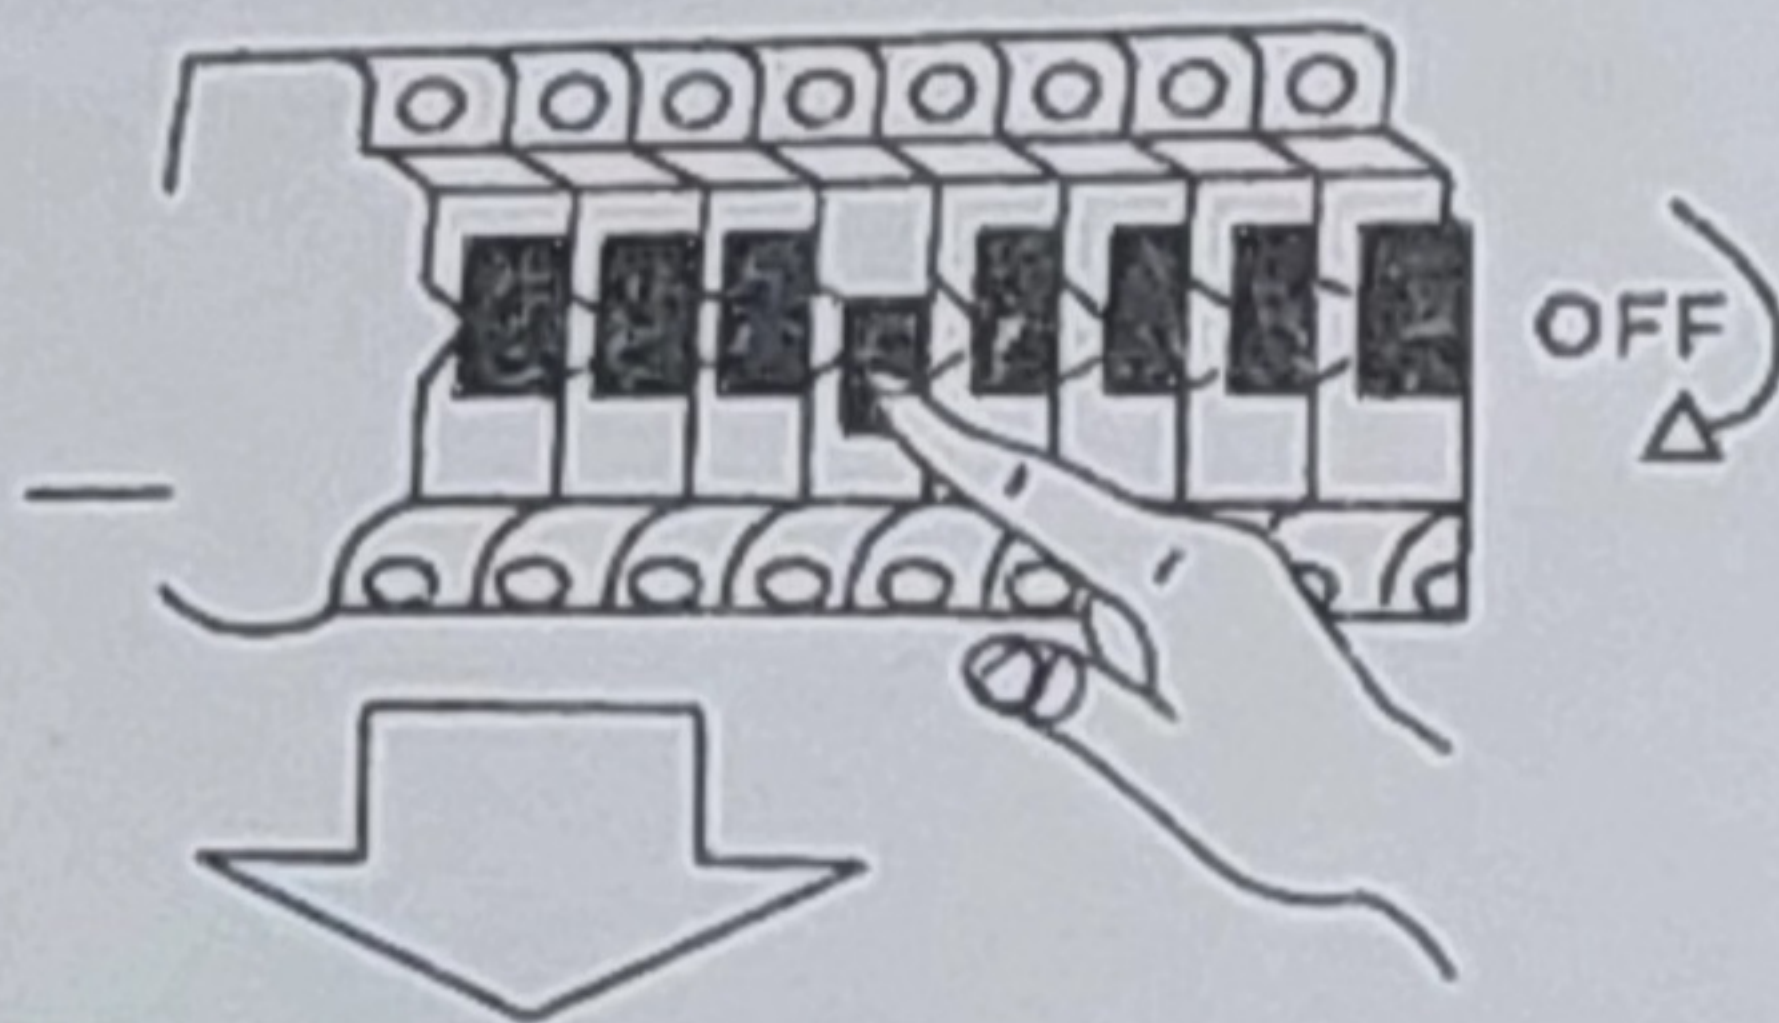

②

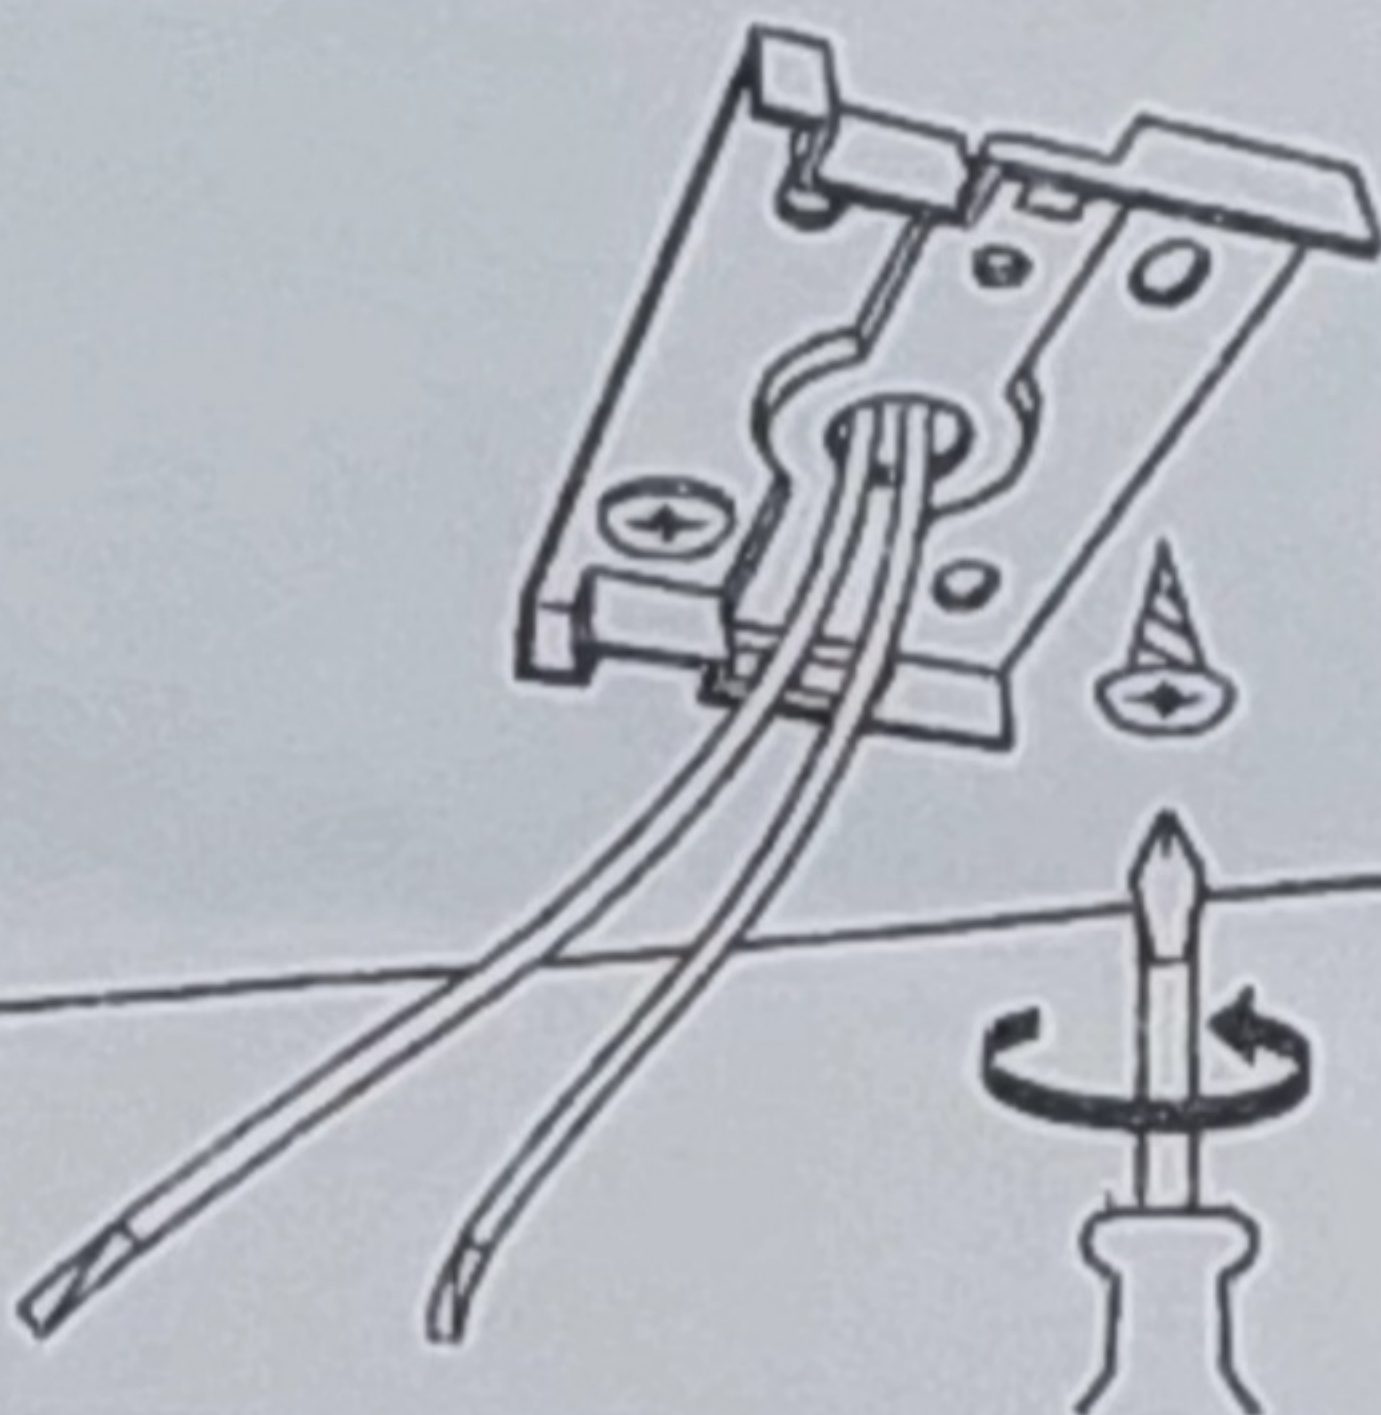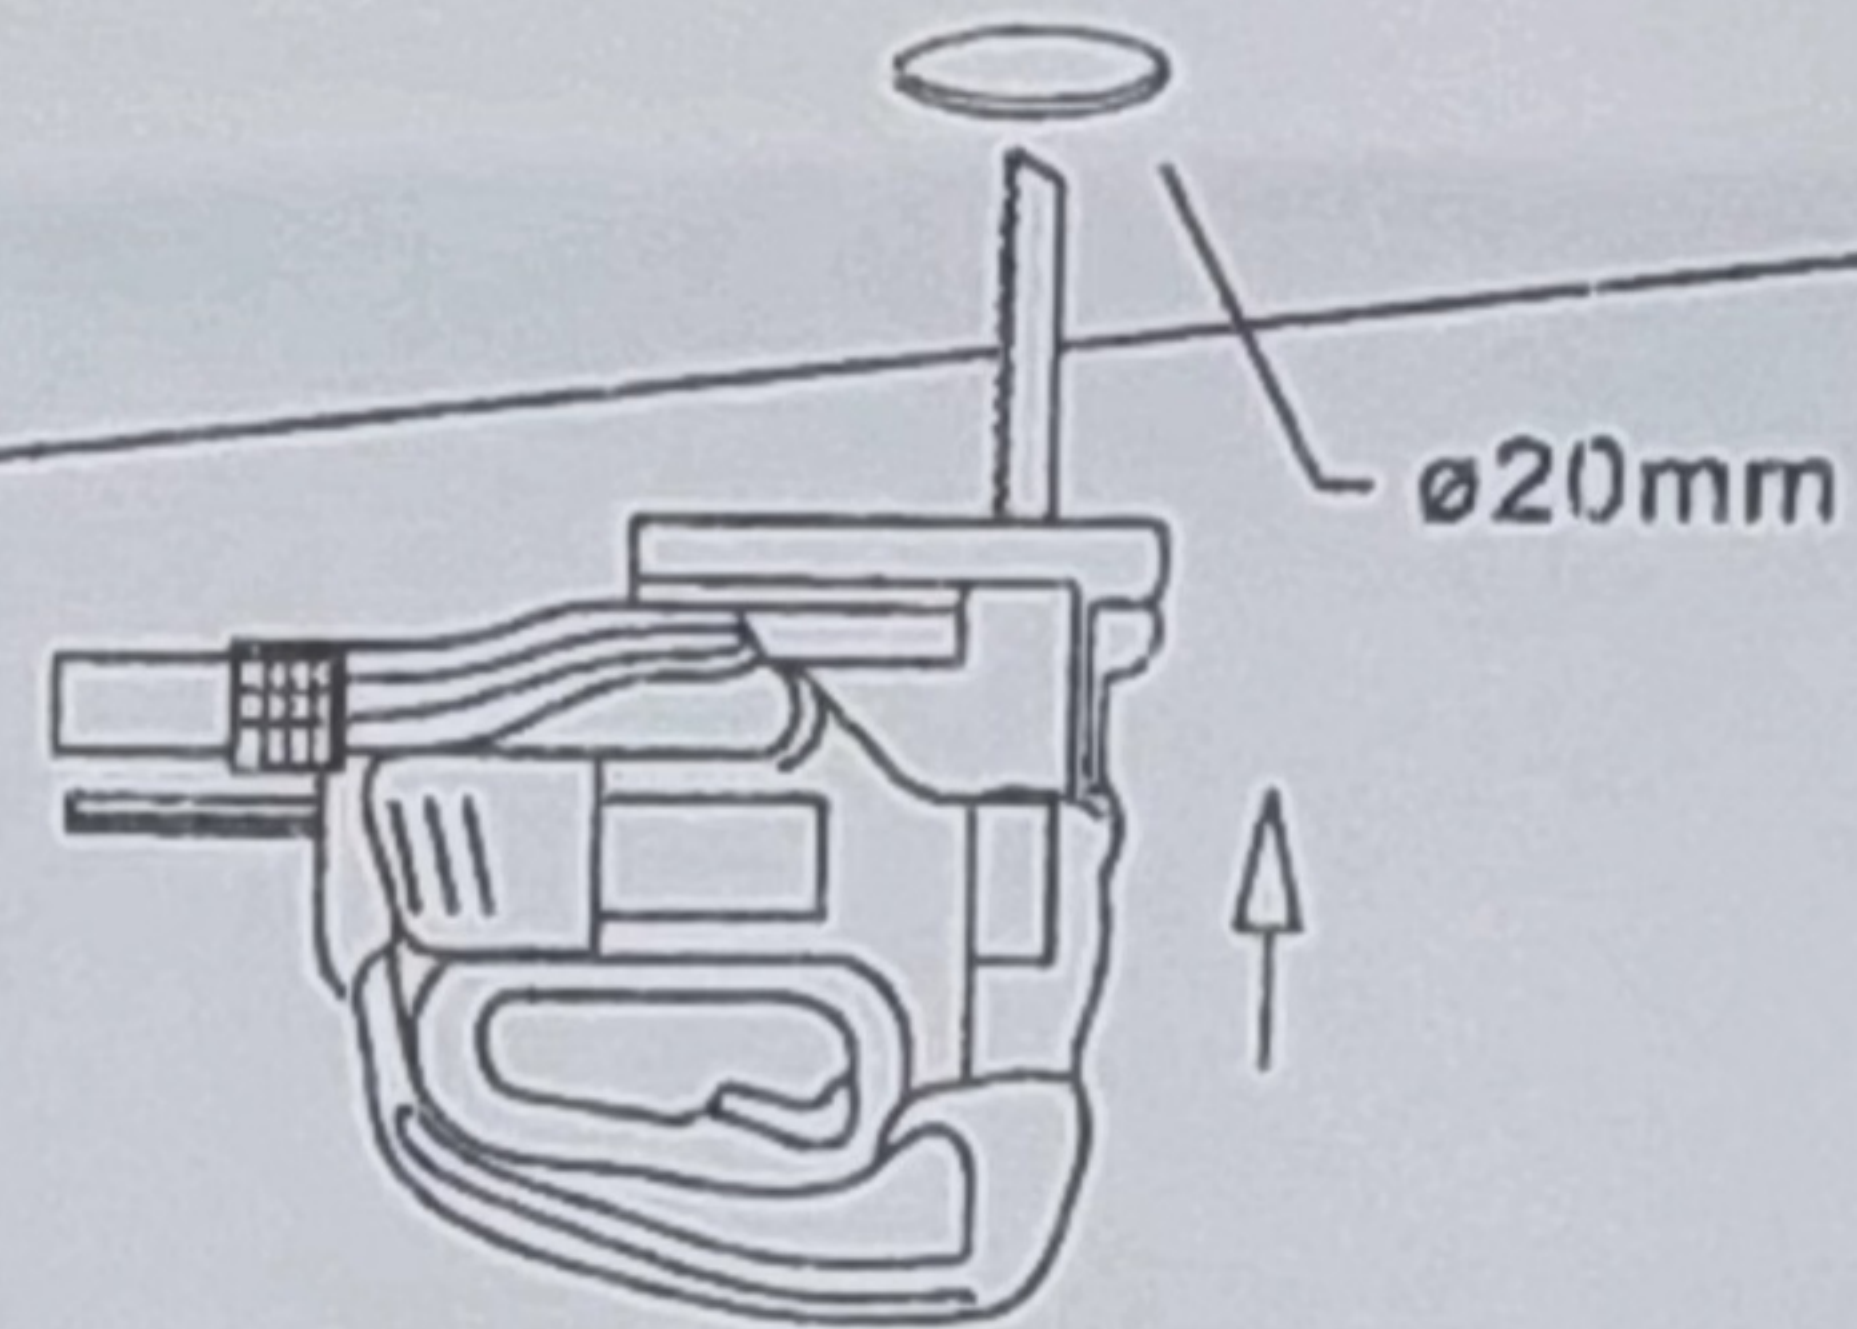


③

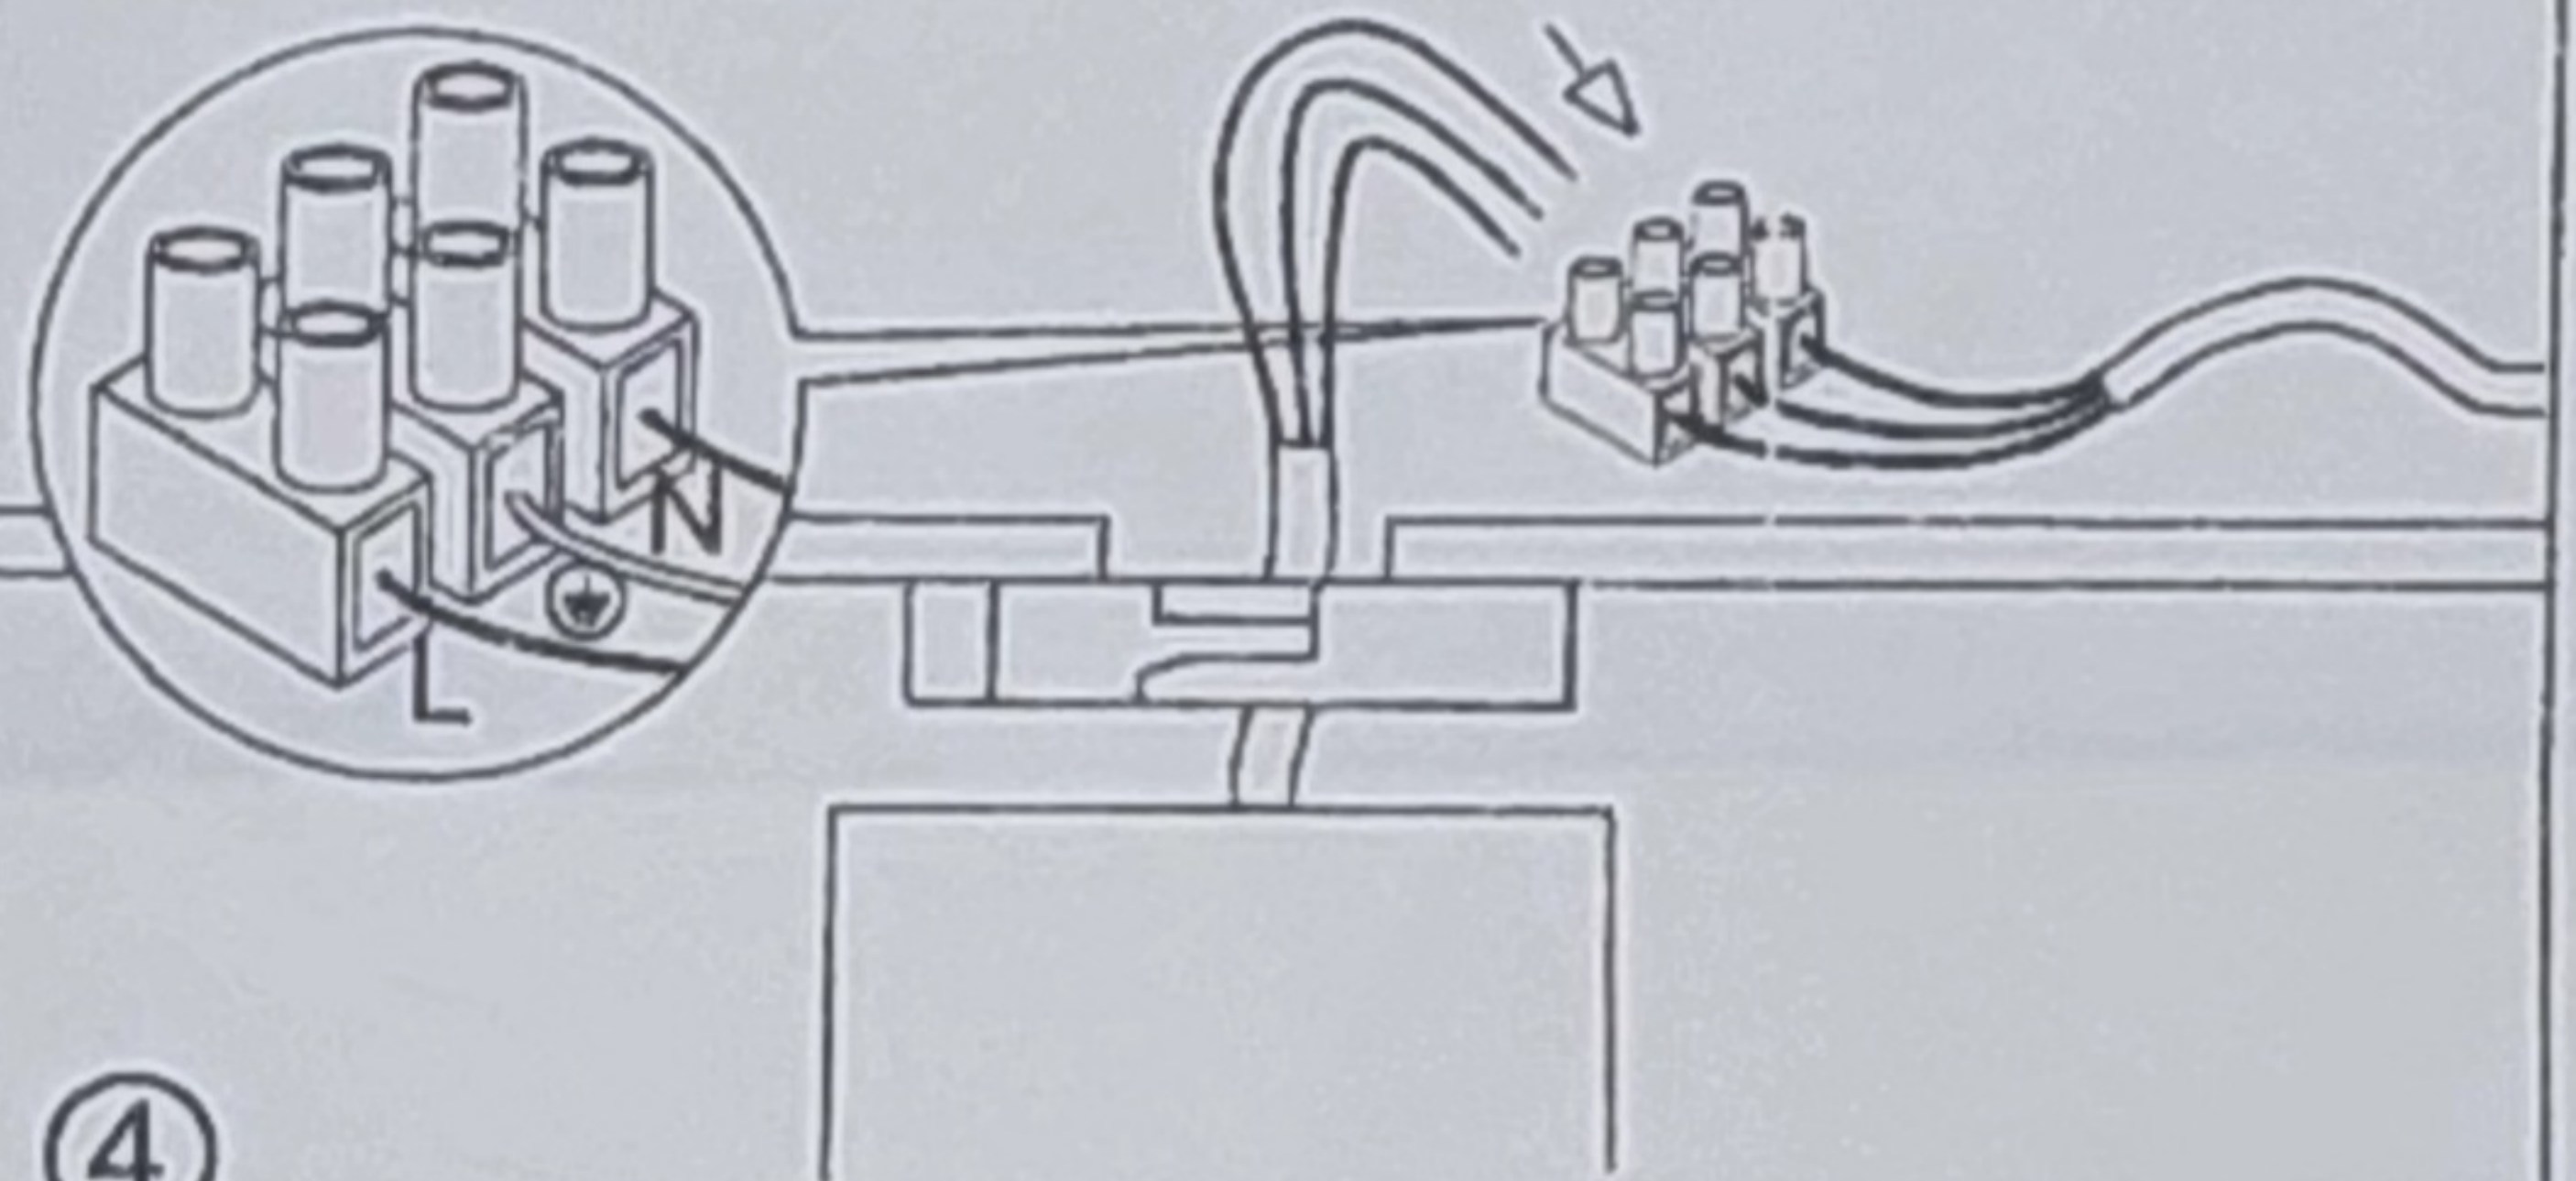


④

⑤

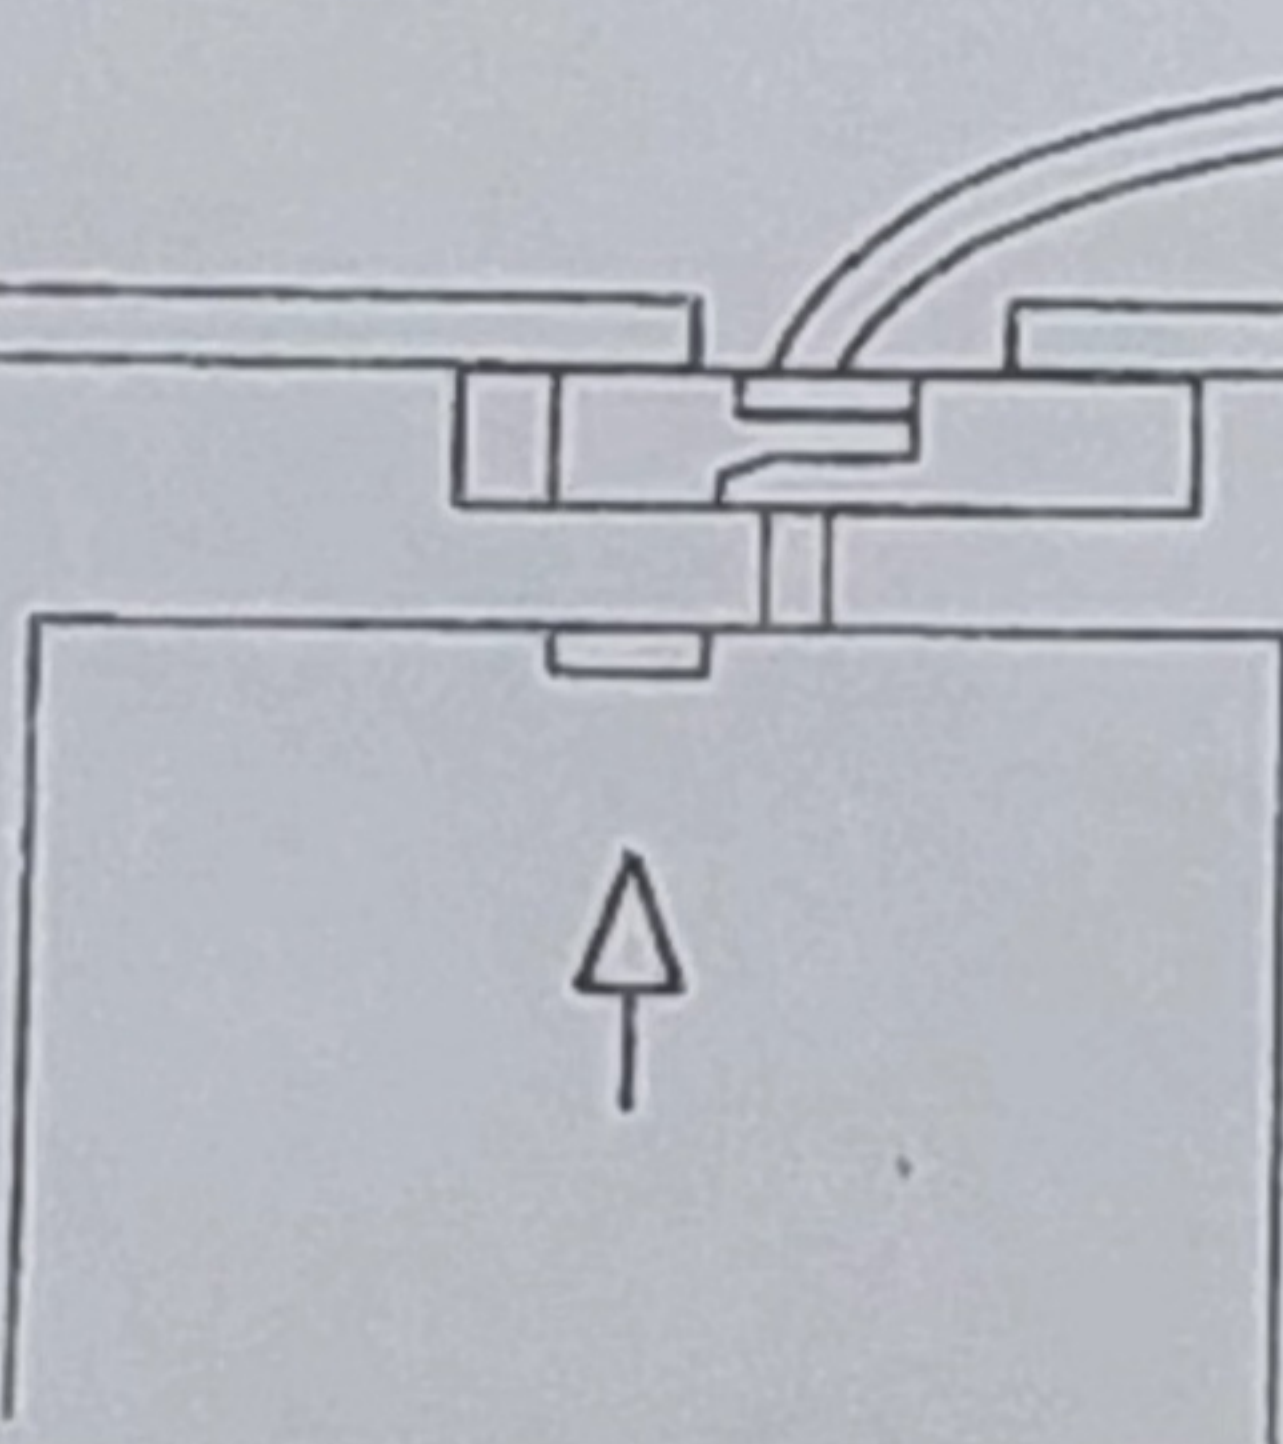


⑥

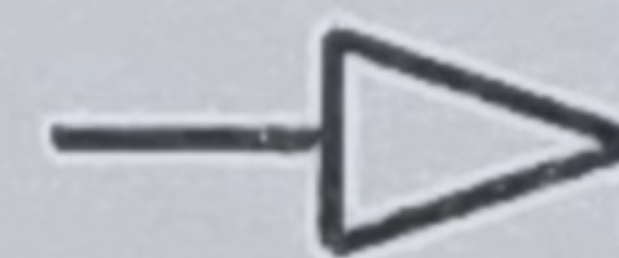

WARNING!

1. Cut off power before installation.
2. Can not be used as emergency light.
3. Nothing should cover the product.
4. The environment temperature of the lamp operation is -10°C to +40°C.

ON

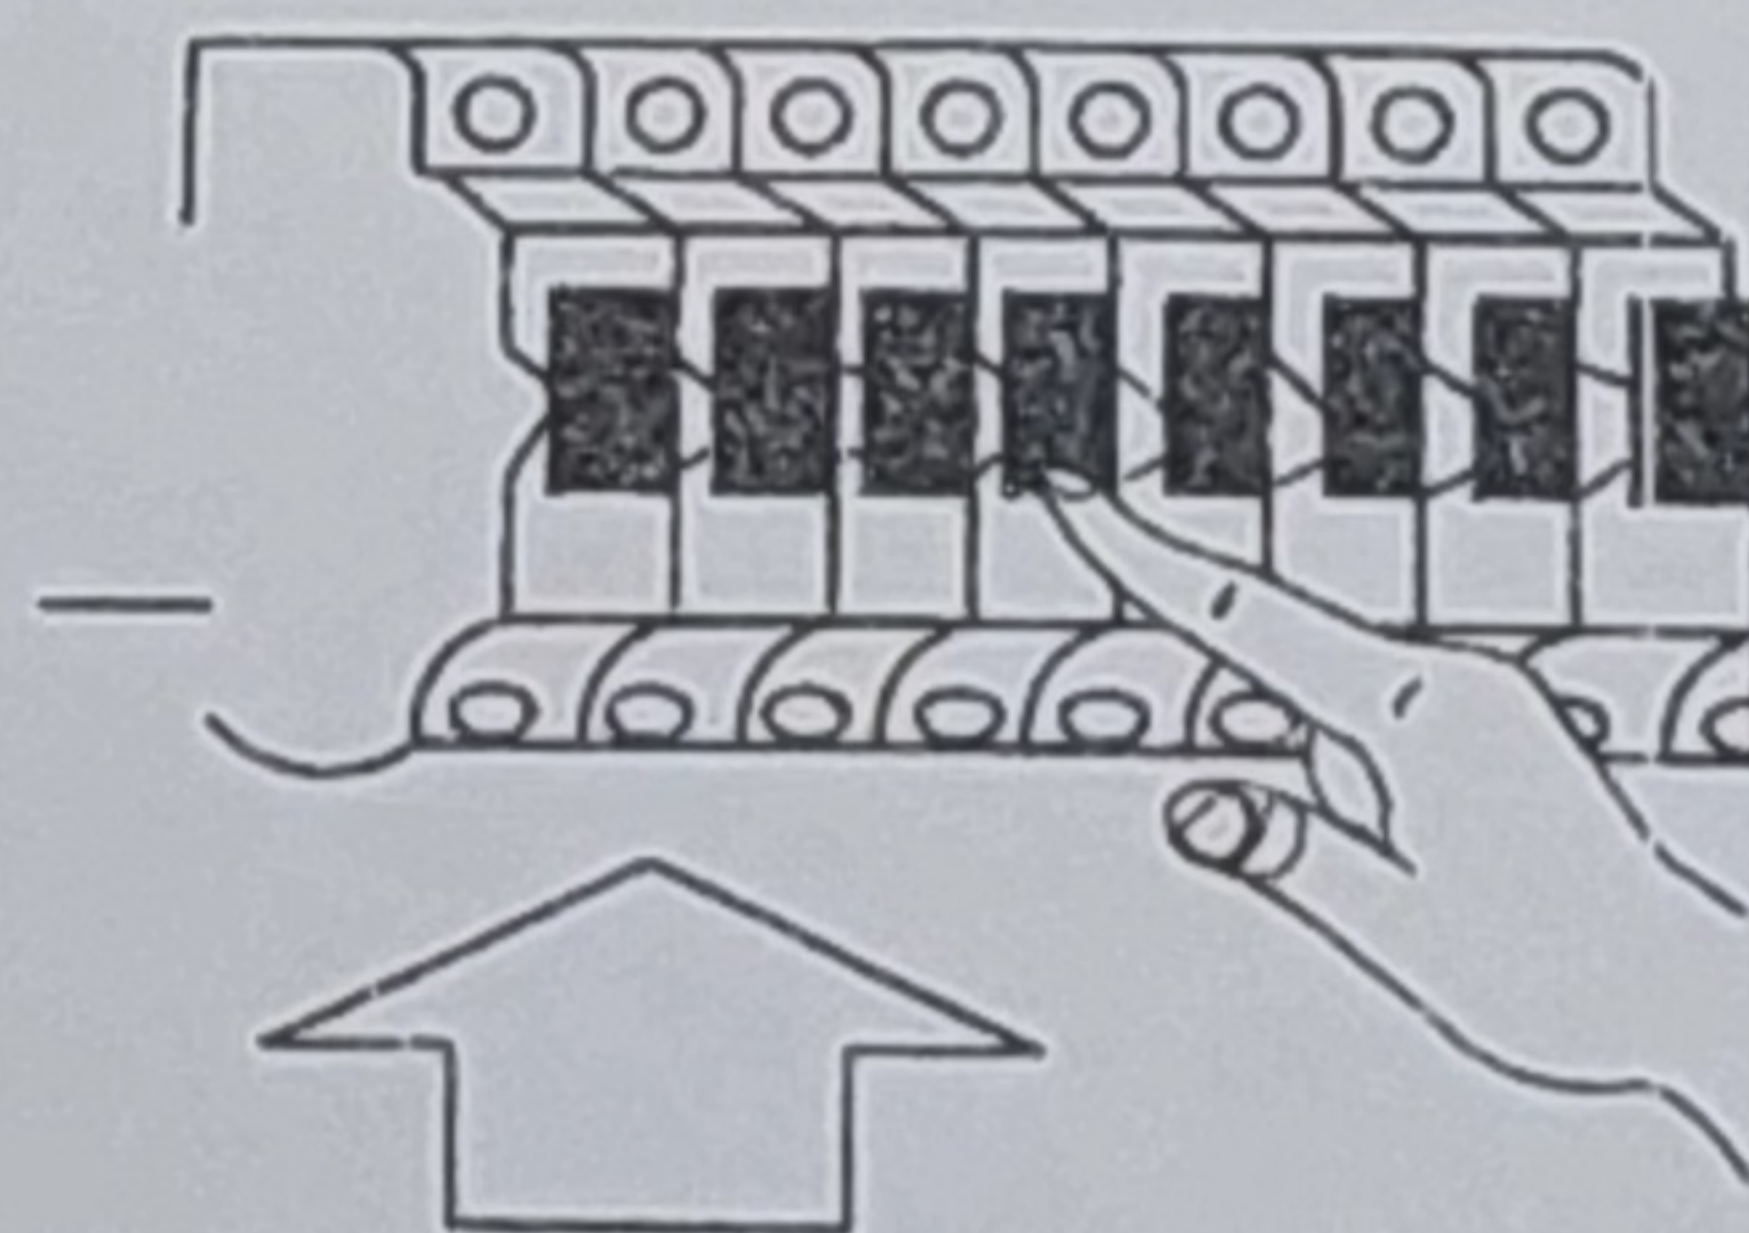

⑦