




SUPER SLIM LED DOWNLIGHT

ITEM No.	LED Power	Luminous Flux	Input Voltage	Beam Angle	IP Rate	Lamp Size	Cutout
ZR-C3008-12W-3000K		1200LM	AC85-265V	30°	20	73×73×95mm	ø20mm
ZR-C3008-12W-6000K		1200LM	AC85-265V	30°	20	73×73×95mm	ø20mm
ZR-C3008-30W-3000K		3000LM	AC85-265V	30°	20	115×115×125mm	ø20mm
ZR-C3008-30W-6000K		3000LM	AC85-265V	30°	20	115×115×125mm	ø20mm

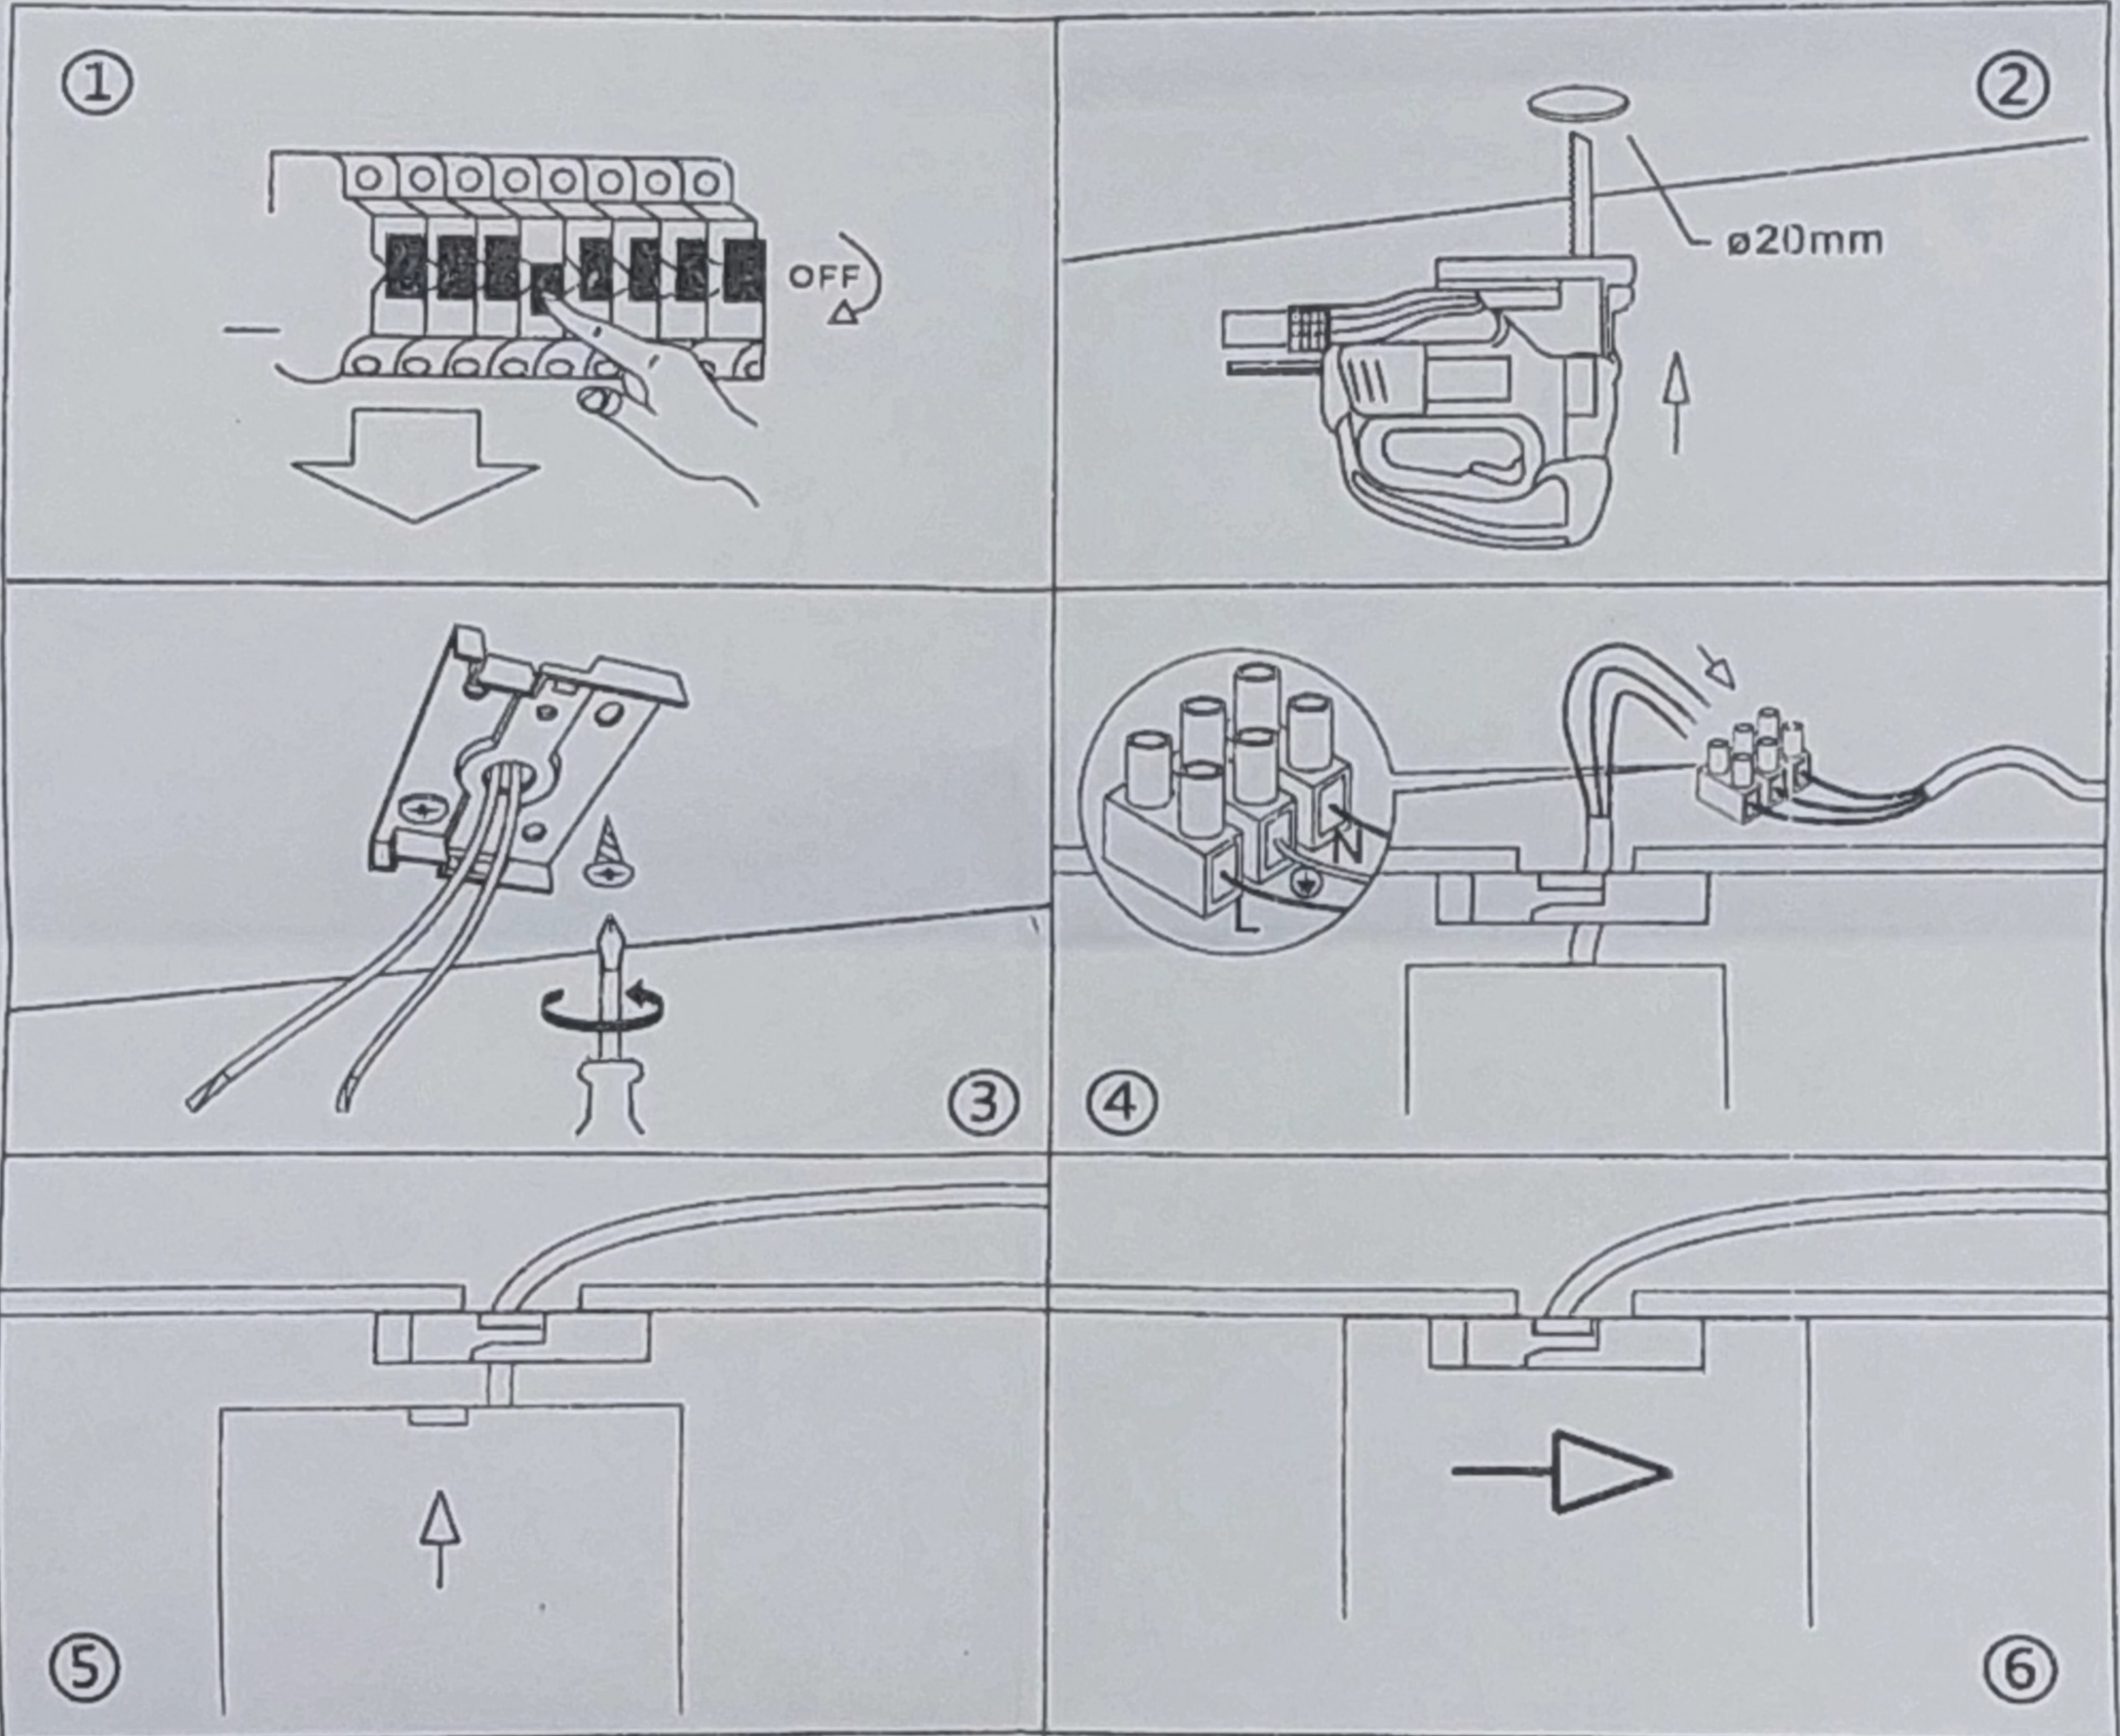

WARNING!

1. Cut off power before installation.
2. Can not be used as emergency light.
3. Nothing should cover the product.
4. The environment temperature of the lamp operation is -10°C to +40°C.

