


## LED WALL LAMP INSTRUCTION LETTER

Model	Power	FRAME COLOR	Color	Size (mm)	uminous Flu	Voltage	Picture
JL171101 5W IP65	5W	BLACK	3000K	150*65*150	SOOLM	85V-265V	
SH-202 3W IP65	3₩	BLACK	3000K	81*63*81	300LM	85Y-265Y	
JL171110- 6W IP65	<b>6</b> W	DARK GRAY	3000K	80+70+142	600LM	85V-265V	
JL171110- 3W IP65	37	DARK GRAY	3000K	79*68*80	300LM	85V-265V	
JLW1710YS 2X3W IP65	6W	DARK GRAY	3000K	160*80*55	600LM	85V-265V	
JLW9020 6*1W	6W	BLACK	3000K	170+80+50	600LM	85V-265V	
JLW1710SA- 2X7W IP65	14₩	BLACK	3000K	175*110*50	1400LM	85V-265V	
JLW1710S- 12W IP65	121	DARK GRAY	3000K	175+90+30	1200LM	85V-265V	
JLWS1711 8W	81	WHITE	3000K	150=150	800LM	85V-265V	
JLWR1711 8W	8.	WHITE	3000K	150	800LM	85V-265V	

## Installation instructions:

- 1. Turn off the electricity.
- 2. Cut the hole in its diameter.
- 3. Connect cables to the gear.
- 4. Press in the spring loaded arms and pull them up through the hole. The springs will pull the fixture up towards the ceiling.
- 5. turn on the electricity.
- 6. lamp works normally.

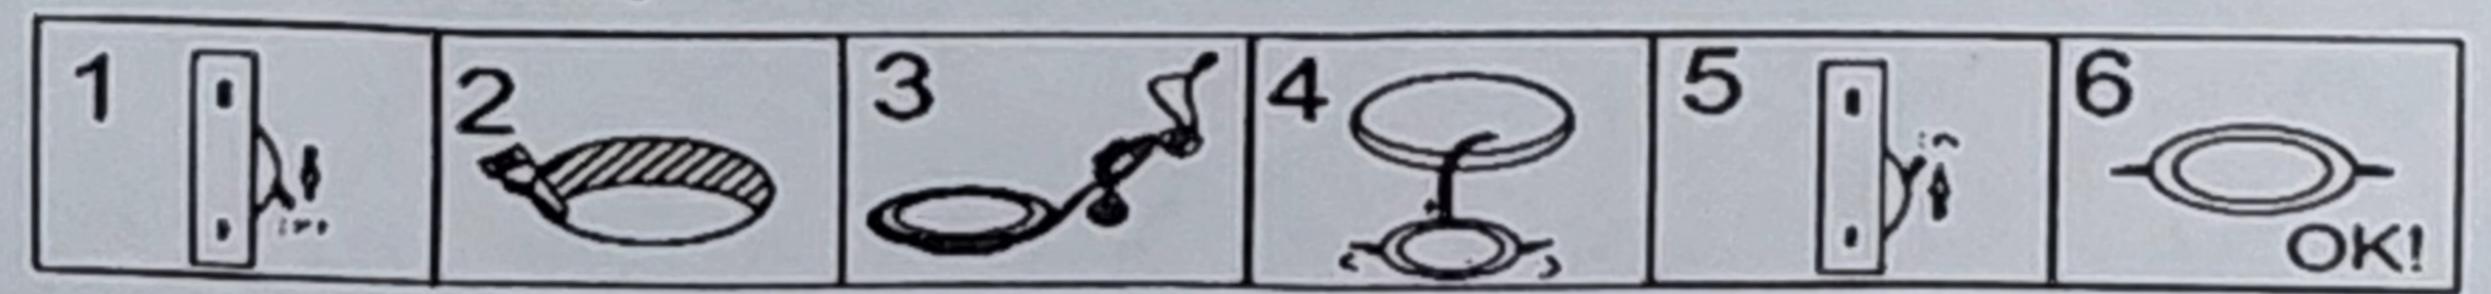

## WARNING!

- 1. Cut off power before installation.
- 2.Can not be used as emergency light.
- 3. Nothing should cover the product.
- 4. The environment temperature of the lamp operation is -10°C to +40°C.