


## Choice of pot

A pot of the stove is all high temperature with the pot to avoid concave and convex, flat parts should be slightly larger than the furnace

Heating area with. Such as a light emitting area is 18cm, the diameter is suitable for 20cm.

If the pot material is too thin, the fry pot easy processes, so please try to use the material thickness of the pot.

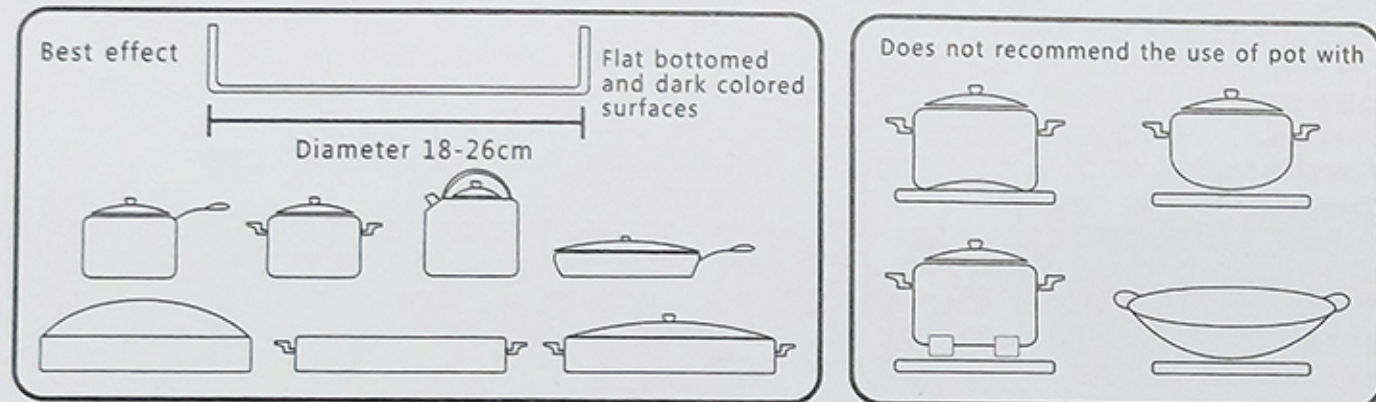

## Fault check

Failure phenomena	Inspection points
Plug in the power cord, press "on / off" button after the power indicator light is not bright, no electricity	Check the plug is plugged in tight socket, power line is good
Sudden stop heating in use	1, ambient temperature is very high, the intake port, exhaust port is blocked; 2, whether to use the setup time has been to; 3, the role of the system protection device, over 10 minutes to use; 4, the use of the process is no operation has reached 2 hours.

## Maintenance cleaning method

Please unplug the power cord before it is maintained, and the panel is recognized to be clean at low temperature.

1) clean, do not wash with water, or the far infrared furnace in water cleaning.

2) in the clean body, control panel, can use neutral lotion to wipe, and then use a soft clean cloth to wipe clean;

3) keep clean in order to avoid the bug morion panel climbed into the body, causing a short circuit;

Date	Maintenance part name	Maintenance man



# INSTRUCTIONS

KITCHEN HELPER  
EVERYTHING IS PROFICIENT.  
POWER SAVING.  
DURABLE



## Ceramic cooker Multi function without pot

Please read this instruction carefully before using.

## Dear customer:

Thank you very much for your purchase of the company's universal focus, in order to make you Products have a more in-depth understanding of; and can be properly used, please read the instructions before using this machine in detail.

## Product introduction

Electric ceramic furnace is a reference to the German advanced technology infrared heating principle. After the electric ceramic furnace is connected to the power supply, the heating component in the furnace can be generated in a number of seconds, up to 500-600 degrees. High temperature, heat transfer from the micro crystal panel to the cooker, so as to achieve the role of cooking food.

## Product features

Do not pick the pot with: the use of the electromagnetic oven to retain the advantages of convenient, beautiful appearance. To make up for the defects of the electromagnetic oven can only he used with an iron pan, used to expand the scope of the pan all out, called never pick the pot stove.

High temperature resistant: the use of advanced glass ceramic panel, the panel can withstand 8501 high temperature, burn not broken, not change color, the panel bright as a mirror, easy to clean, environmental protection.

Environmental protection: no radiation, no radiation, high-frequency electromagnetic radiation of an ordinary as everyone knows, the electromagnetic oven is equivalent to 15 of the mobile phone, while the universal range of far infrared, with health care heating, infrared wave in 87% focused on the 8um-15UM conversion rate of more than 70% infrared radiation, infrared energy per square 765.9W, long-term use can play health care physiotherapy the efficacy, especially can effectively activate human cells, promote blood circulation, enhance immunity, has accelerated The new supersedes the old., dehumidification, deodorization, antibacterial, anti fatigue, anti-aging, the role of physical health.

Functional advantages: make meals taste good, thermal design, thermal energy from weak to strong strong heat evenly, ensure the flavor and taste of dishes. Moreover, it is designed for furnace safety design, equipped with intelligent overheating protection device, automatic shutdown according to the time, even if you forget to close after it, never worry about.

High thermal efficiency: fast heating up, the maximum temperature of up to 700 degrees, through the multi segment precise power control, can be rapid cooking, and the heat source concentration, energy saving, power saving.

Safe use: a new microcomputer control, high and low voltage absolutely separate, overheating protection, leak proof, waterproof, safe and reliable.

Environmental protection: no fire, does not produce carbon monoxide, cooking visible red light, so that users can easily identifiablestoveis working.

Special note: This product is not suitable for children or mentally retarded persons so as to avoid danger!

## Key note

First, the power supply of digital furnace plug into 15A220V AC power supply socket used alone, the machine is connected to the power supply indicator lamp sparkles, press the on / off button, the indicator light, display, and fan work at the same time, touch the "rotation" key rotation direction "+" fire from weak to strong. Touch "rotation" key to the direction "-" fire from strong to weak, when in use, according to the requirement of cooking fire, which can rotate around the thermostat, choose the desired cooking fire.

Overheating protection device. When cooking, if the temperature is too high, the microcomputer system to automatically reduce the output power, after the normal temperature. Automatically up to the original set of power. If you exceed the police temperature, the microcomputer will automatically shut down, only to lower the temperature, the restart to work properly.

Timing function: shutdown time of manual cooking modes for timing, timing time range is 23 hours and 59 minutes, the time has been set up, the stove into the countdown, time, furnace that automatically shut down this appointment; cooking time, press the other button that will cancel the setting, individual functions in order to prevent dry the furnace protection, the system default 2 hours unattended operation that automatically shut down.

After pressing the on / off key, the internal temperature of the furnace is very high and the fan is still running. In order to extend the service life of the furnace, please do not pull out the power plug when the high temperature indicator light is not bright (about 15 minutes).

## Fault code

1, after the failure, it is necessary to set off the power line and troubleshooting before it can be re boot;  
2, the alarm phenomenon: the digital tube flashing display fault code; buzzer alarm for one minute.

Display code	Cause of failure
E1	Thermocouple short circuit alarm
E2	The thermocouple open or over temperature in the cooker
E3	Fan open or short circuit
E4	Circuit board ambient temperature over temperature

## Safety tips

- 1, the stove surface will become hot in the process of using, burn care!
- 2, this product is not suitable for children or mentally retarded persons, so as to avoid danger!
- 3, if there is a crack on the surface to turn off the stove stove to avoid the possibility of electric shock!
- 4, metal items such as knives, forks, spoons and caps should not be placed on the surface of the cooking area, as they may become hot.
- 5, overheating protection: if the machine fails or due to negligence caused by overheating, the machine will automatically shut down to ensure safety.
- 6, the board can not bear the weight of more than 10kg.
- 7, after shutting down the power cord can not be immediately set aside, so that fans continue to operate to reduce the furnace temperature; in the use of the process do not plug into the air.