

CHOOSE THE BEST

- Acetic Silicone Sealant
- Neutral Silicone Sealant
- Acrylic Sealant
- Two Part Silicone Sealant
- PU Sealant
- PU Foam
- Nail Free Glue (Bond)
- MS Sealant

Shandong Nice Building Materials Co.,Ltd.



ABOUT US

Shandong Nice Building Materials Co., Ltd. was founded in 2009,and located in Weifang city,Shandong province,which is the largest building materials base in China.The annual production capacity is over 60000 tons. As a professional manufacturer,we pay more attention to quality control,we have set up a complete quality control system,to ensure good and stable quality products.





CONTENTS

- General Purpose Silicone Sealant 03
- Acetoxy Silicone Glass Sealant 04
- Weatherproof Silicone Sealant 05
- Structural Silicone Sealant 06
- Double Component Structural Silicone Sealant 07
- Nail Free Glue（Bond） 08
- Waterproof Acrylic Sealant 09
- Polyurethane Foam Spray 10
- Polyurethane Sealant 11
- NICE-RTV 12

Shandong Nice Building Materials Co.,Ltd.



A-201

A-201 General Purpose Silicone Sealant is a cost effective,general purpose,acetic cure silicone sealant. It is suitable for general glazing and for general sealing of different substrates including glass,some metals, enamel,non-oily woodand ceramic tiles etc.



A-7132

A-7132 Acetoxy Silicone Sealant is a one-part acetoxy cure silicone sealant.It is designed for sealing of interior & exterior glass decoration, small aquarium and for sealing of glass cabinet.



N-789、7700

N-789、7700 Weatherproof Silicone Sealant for Window & Door.It's a one-part,neutral cure architectural grade silicone sealant specially designed for sealing of connection and perimeter joints in the assembly of windows and doors and for sealing of connection joints interior and exterior wall.



N-995、9900

N-995、9900 Structural Silicone Sealant is a high performance,100% neutral curing, architectural grade silicone sealant designed specifically for structural bonding and protective glazing applications.



NICE-9100

NICE-9100 Double Component Structural Silicone Sealant is a two-part, neutral curing silicone sealant specially designed for structural bonding of curtain wall materials including glass,marble,granite, aluminum panel and steel.



Nail Free Glue

Nail Free Glue is a multi-purpose construction adhesive designed for use with a variety of building materials and is ideal for installing wall and ceiling drywall,baseboards and forehead beams.



A-100

A-100 Waterproof Acrylic Sealant is a single component gun grade sealant formulated by using acrylice mulsions.Hence the product is easy to apply and efficiently seals joints between construction parts subjected to moderate stress.It is a ready to use and seals internal and external joints in porous substrate such as concrete plastics asbestos,cement,brick work and wood.



PU Foam

A one-component, moisture cure, polyurethane foam for general purpose applications in mounting, filling, sealing insulating and sound insulating in concrete, plaster, brick floorboard,most plastics, metal, glass or wood.It offers good expansion yield, no sagging, and using ozone friendly propellant(CFC Free).It is mould proof, water and ageing resistant, and provides good thermal and acoustic solutions.



NICE PU Sealant

Nice PU Sealant is one component polyurethane adhesive with very good tensile strength and elasticity primer-less.Bond very well with surface of variety material such as all kinds of metal,lumber.glass polyurethane,epoxy,resin and coating material,etc.Good cohesive force and durable elastic sealing performance.



NICE-RTV

RTV silicone is a versatile compound that can be used in many ways, in a variety of industries. This versatility makes RTV silicone convenient to use. You see RTV silicone used in construction and automotive maintenance, as well as theatre and at-home projects.

Nice A-201 General Purpose Silicone Sealant



DESCRIPTION

A-201 General Purpose Silicone Sealant is a cost effective,general purpose, acetic cure silicone sealant. It is suitable for general glazing and for general sealing of different substrates including glass,some metals,enamel,non-oily wood and ceramic tiles etc.

APPLICATIONS

Repairing,plumbing,gap-filing and glazing

COLOURS

Clear,white,black,grey and other colors based on customer's requirement.

PACKAGE&SIZE

Size: 280ml or 300ml/cartridge;200L/drum
Package: 24 or 25 cartridges/box; Or customization

STORAGE AND SHELF LIFE

When stored at 25°C or lower temperature in the original unopened container A-201 has a shelf life of 12 months from the date of manufacture.

TYPICAL PROPERTIES

These values are for reference only and are not intended for use in preparing specifications.

Uncured-As tested at 50% RH and 23°C		
Flow,Sag or Slump	1mm max	ASTM C639
Tack-free Time	≤10mins	
Extrusion Rate	800 ml/minute	ASTM C603
Curing Speed	2-4 mm/day	
Working Time	5 mins	
Application Temperature	4°C to 40°C	
Curing Time	≤24 hours	
Specific Gravity	0.95-1.0g/cm³	
Uncured-As tested at 50% RH and 23°C		
Durometer Hardness,Shore A	20-26	
Ultimate Tensile Strength	≥1.1Mpa	ASTM D412
Elongation at Break	≥380%	
Temperature Resistance	-30°C to 90°C	



Nice A-7132 Acetoxy Silicone Glass Sealant





DESCRIPTION

A-7132 Acetoxy Silicone Sealant is a one-part acetoxy cure silicone sealant. It is designed for sealing of interior & exterior glass decoration, small aquarium and for sealing of glass cabinet.

APPLICATIONS

Glass decoration,glass cabinet,aquarium.

COLOURS

Clear,white,black,grey and other colors based on customer's requirement.

PACKAGE&SIZE

Size: 280ml or 300ml/cartridge;200L/drum
Package: 24 or 25 cartridges/box; Or customization

STORAGE AND SHELF LIFE

When stored at 25°C or lower temperature in the original unopened container, A-7132 has a shelf life of 12 months from the date of manufacture.

TYPICAL PROPERTIES

These values are for reference only and are not intended for use in preparing specifications.

Uncured-As tested at 50% RH and 23°C		
Flow,Sag or Slump	1mm max	ASTM C639
Tack-free Time	6 mins	
Extrusion Rate	600 ml/minute	ASTM C603
Curing Speed	6 mm/day	
Working Time	5 mins	
Application Temperature	4°C to 40°C	
Curing Time	15 hours	
Specific Gravity	1.03g/cm³	
Uncured-As tested at 50% RH and 23°C		
Durometer Hardness,Shore A	30	
Ultimate Tensile Strength	1.4Mpa	ASTM D412
Elongation at Break	500%	
Temperature Resistance	-30°C to 90°C	



N-789,7700 Weatherproof Silicone Sealant for Window & Door



DESCRIPTION

N-789,7700 Weatherproof Silicone Sealant It's a one-part,neutral cure architectural grade silicone sealant specially designed for sealing of connection and perimeter joints in the assembly of windows and doors and for sealing of connection joints interior and exterior wall.

APPLICATIONS

Installation of window and door.

COLOURS

Clear,white,black,grey and other colors based on customer's requirement.

PACKAGE&SIZE

Size: 280ml or 300ml/cartridge;200L/drum; 590ml/sausage
Package:24 or 25 cartridges/box; 20 sausages/box; Or customization

STORAGE AND SHELF LIFE

When stored at 25°C or lower temperature in the original unopened container N-789,7700 has a shelf life of 12 months from the date of manufacture.


TYPICAL PROPERTIES

These values are for reference only and are not intended for use in preparing specifications.

Uncured-As tested at 50% RH and 23°C		
Flow,Sag or Slump	1mm max	ASTM C639
Tack-free Time	<10 mins(transparent) <20 mins(white/black/grey)	
Extrusion Rate	410 ml/minute	
Curing Speed	4-6 mm/day	
Working Time	15 mins	
Application Temperature	4°C to 40°C	
Curing Time	<24 hours(transparent) <72 hours(white/black/grey)	
Specific Gravity	1.0g/cm³ <1.38g/cm³(white/black/grey)	
Uncured-As tested at 50% RH and 23°C		
Durometer Hardness,Shore A	26(transparcnt) 48(white/black/grey)	
Ultimate Tensile Strength	1.4Mpa	
Temperature Resistance	≥300%	
Elongation at Break	-30°C to 90°C	



N-995,9900 Structural Silicone Sealant

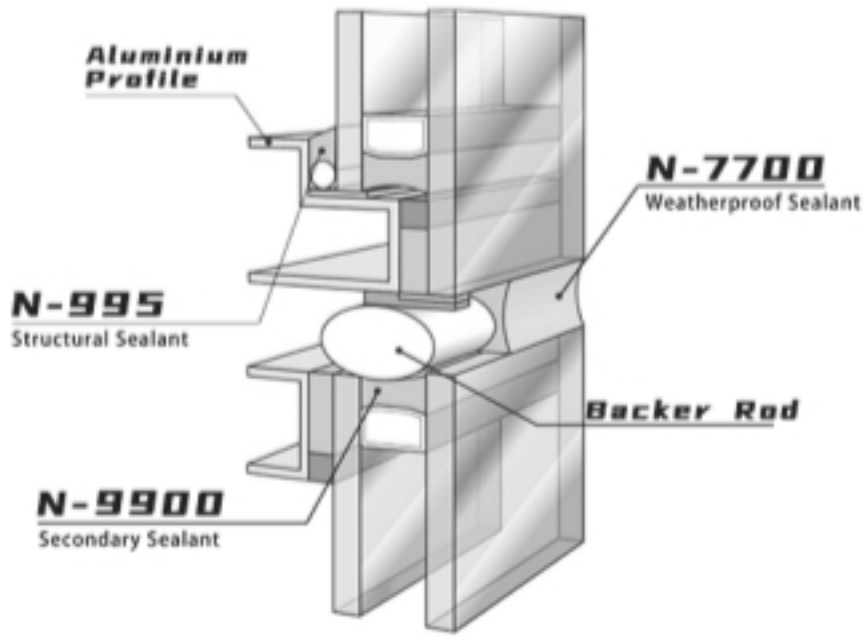

DESCRIPTION

N-995、9900 Structural Silicone Sealant is a high performance,100% neutral curing, architectural grade silicone sealant designed specifically for structural bonding and protective glazing applications.

APPLICATIONS

Structural bonding and glazing of curtain wall compatible spacer.

COLOURS

Clear,white,black,grey and other colors based on customer's requirement.

PACKAGE&SIZE

Size: 280ml or 300ml/cartridge;200L/drum; 590ml/sausage
Package:24 or 25 cartridges/box; 20 sausages/box; Or customization

STORAGE AND SHELF LIFE

When stored at 25°C or lower temperature in the original unopened container, N-995,9900 has a shelf life of 12 months from the date of manufacture.

TYPICAL PROPERTIES

These values are for reference only and are not intended for use in preparing specifications.

Uncured-As tested at 50% RH and 23°C		
Flow,Sag or Slump	None Sag	ASTM C639
Tack-free Time	15-20 mins	
Extrusion Rate	400 ml/min	ASTM C603
Curing Speed	2-4 mm/day	
Working Time	15 mins	
Application Temperature	4°C to 40°C	
Curing Time	48 hours	
Specific Gravity	1.32g/cm³	
Uncured-As tested at 50% RH and 23°C		
Durometer Hardness,Shore A	48	
Ultimate Tensile Strength	1.45Mpa	ASTM D412
Elongation at Break	450%	
Temperature Resistance	-30°C to 150°C	



NICE-9100 Double Component Structural Silicone Sealant



DESCRIPTION

NICE-9100 Double Component Structural Silicone Sealant is a two-part, neutral curing silicone sealant specially designed for structural bonding of curtain wall materials including glass,marble,granite, aluminum panel and steel.

APPLICATIONS

Structural bonding of curtain wall materials including glass,marble, granite, aluminum panel and steel .

COLOURS

Part A base of NICE-9100 is white, part B(curing agent) is black.
It is black color after mixing of the two parts.

PACKAGE&SIZE

Component A(base) is available in 190L drums;
Component B(curing agent) is available in 19L pail.

STORAGE AND SHELF LIFE

When stored at 25°C or lower temperature in the original unopened container, NICE-9100 has a shelf life of 12 months from the date of manufacture.


TYPICAL PROPERTIES

These values are for reference only and are not intended for use in preparing specifications.

Part A		
Density at 23°C	1.00-1.02 g/cm³	
Part B		
Density at 23°C	1.00-1.02 g/cm³	
Mixed by rate:10:1~12:1		
Tooling time(23C/50% r.h.)	10-30 mins	
Skin-forming time at 23C/50% r.h.	25~45 mins	
Tack free time at 23C/50% r.h.	50-90 mins	
Consistency	Non-sag	
Hardness,Shore A	45	
Tensile strength	1.50 N/mm²	
Ultimate Tensile Strength	250%	
Joint movement capability	25%	
Temperature Resistance	-30°C to 150°C	



Nail Free Glue (Bond)

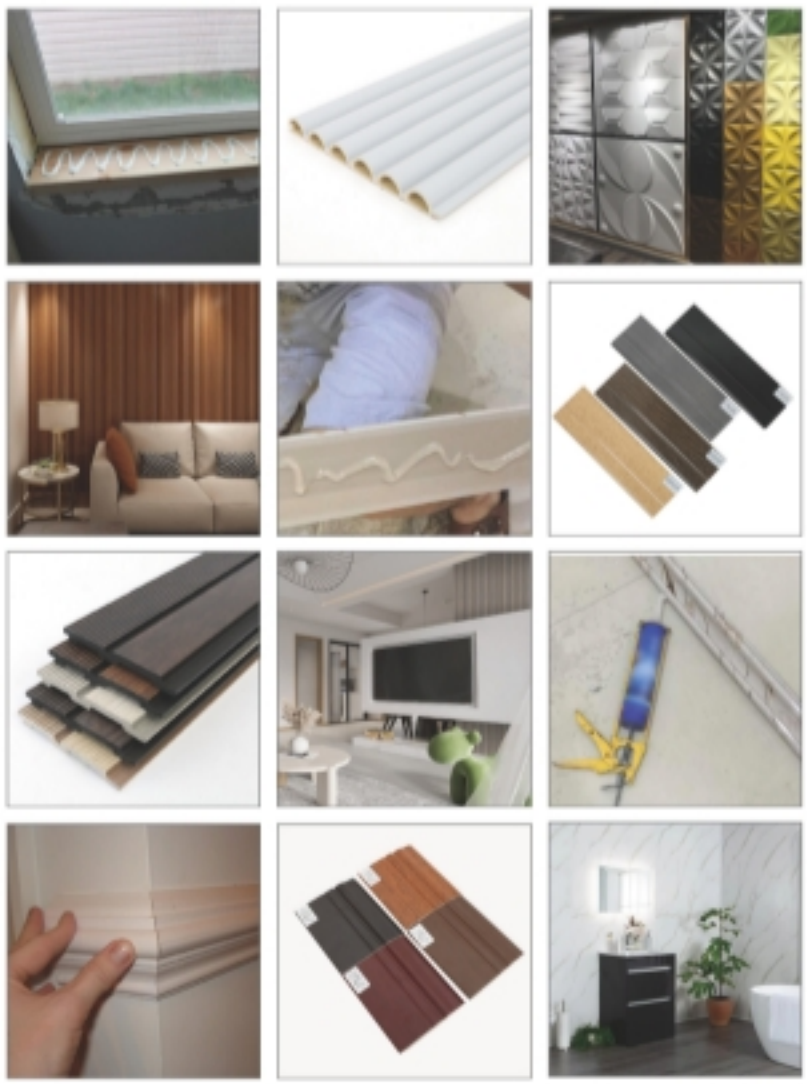

DESCRIPTION

Nail Free Glue is a multi-purpose construction adhesive designed for use with a variety of building materials and is ideal for installing wall and ceiling drywall, baseboards and forehead beams.

APPLICATIONS

All bonding in assembly techniques:
- Bonding in the renovation industry;
- Bonding in construction industry;
- Bonding of cable trays and panels.

ADVANTAGE

- High strength bonding;
- Stronger and more durable;
- Suitable for any climate;
- Suitable for most materials.

COLOURS

Clear,white,beige or other colours.

PACKAGE

Size: 300ml or 310ml/cartridge;
Package:20 or 24 cartridges/box.

Uncured-As tested at 50% RH and 23°C	
Basis	Synthetic rubber
Appearance	Thixotropic, heavy paste like consistency
Specific Gravity	1.02g/ml(transparent) 1.28g/ml(white,beige)
Sag	None Sag
Odour	Light solvent smell
Curing system	Physical drying and crystallisation
Working Time (initial contact)	5-10 mins depending on temp.
Open Time (reposition)	20 to 30 mins depending on temp.
Maximum bearing capacity	100kgs
Processing Temperature	4°C to 40°C
Temperature Resistance	-20°C to 70°C



Nice A-100 Waterproof Acrylic Sealant



DESCRIPTION

A-100 Waterproof Acrylic Sealant is a single component gun grade sealant formulated by using acrylic mulsions.Hence the product is easy to apply and efficiently seals joints between construction parts subjected to moderate stress.It is a ready to use and seals internal and external joints in porous substrate such as concrete plastics asbestos,cement,brick work and wood.

APPLICATIONS

For sealing and connection gaps with small compression force and elongation in the interior eg.for sealing of rifts in brickwork,rendering or cement.

COLOURS

Black,gray,white or other colours.

PACKAGE&SIZE

Size: 280ml or 300ml/cartridge;200L/drum; 590ml/sausage
Package:24 or 25 cartridges/box; 20 sausages/box; Or customization

STORAGE AND SHELF LIFE

When stored at 25°C or lower temperature in the original unopened container,A-100 has a shelf life of 12 months from the date of manufacture.


TYPICAL PROPERTIES

These values are for reference only and are not intended for use in preparing specifications.

Uncured-As tested at 50% RH and 23°C		
Flow,Sag or Slump	None Sag	ASTM C639
Tack-free Time	15-20 mins	
Extrusion Rate	400 ml/min	ASTM C603
Curing Speed	2-4 mm/day	
Working Time	5 mins	
Application Temperature	4°C to 40°C	
Curing Time	48 hours	
Specific Gravity	1.3-1.5g/cm³	
Uncured-As tested at 50% RH and 23°C		
Durometer Hardness,Shore A	40	
Ultimate Tensile Strength	1.4 Mpa	ASTM D412
Elongation at Break	180%	
Temperature Resistance	-30°C to 90°C	



NICE Polyurethane Foam Spray

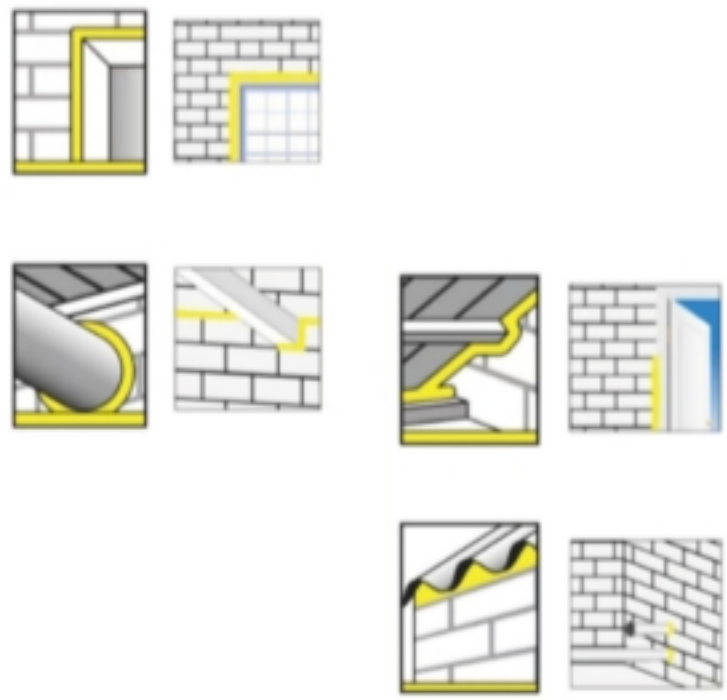

DESCRIPTION

A one-component, moisture cure, polyurethane foam for general purpose applications in mounting, filling, sealing insulating and sound insulating in concrete, plaster, brick floorboard,most plastics, metal, glass or wood.It offers good expansion yield, no sagging, and using ozone friendly propellant(CFC Free).It is mould proof, water and ageing resistant, and provides good thermal and acoustic solutions.

APPLICATIONS

Ideal for filling irregular holes or awkward gaps, heat insulation of central heating systems, and insulating wall panels. Suitable for use on various construction materials (concrete, brick, mostplastics,metal, glass, woods,etc).

COLOUR

White

PACKAGE&SIZE

300ml,500ml,750 ml per can,12 cans or 15 cans in per box.



STORAGE AND SHELF LIFE

When stored at 25°C or lower temperature in the original unopened container,PU Foam has a shelf life of 12 months from the date of manufacture.

TYPICAL PROPERTIES

These values are for reference only and are not intended for use in preparing specifications.

Uncured-As tested at 50% RH and 23°C		
Flow,Sag or Slump	None Sag	
Tack-free Time	10 mins	
Volume Coverage	Max.38L	
Cure Time(20 mm Diameter)	45 mins	
Water Permeability	No	
Temperature Resistance Range	-40°C to -110°C(ntermittent) -30°C to-80"C(Long term)	
Formaldehyde/ Dimethylbenzene	No	
Thermal conductivity	0.046W/m.k	
Application Temperature	5°C to 35°C	
Ultimate Tensile Strength	1.4 Mpa	
Temperature Resistance	-30°C to 90°C	

NICE PU Sealant



DESCRIPTION

Nice PU Sealant is one component polyurethane adhesive with very good tensile strength and elasticity primer-less.Bond very well with surface of variety material such as all kinds of metal,lumber.glass polyurethane,epoxy,resin and coating material,etc.Good cohesive force and durable elastic sealing performance.

APPLICATIONS

Specially used for windshield and side glass of bus, car, Rail vehicle (metro, high-speed rail), engineering machinery vehicle, and other construction applications.



COLOURS

Black,gray,white or other colours.

PACKAGE&SIZE

280ml or 300ml cartridge.12,20 or 24 cartridges/box
400ml or 600ml sausage,20 sausages/box

STORAGE AND SHELF LIFE

When stored at 25°C or lower temperature in the original unopened container, Nice PU Sealant has a shelf life of 12 months from the date of manufacture.

TYPICAL PROPERTIES

These values are for reference only and are not intended for use in preparing specifications.

Uncured-As tested at 50% RH and 23°C		
Flow,Sag or Slump	None Sag	ASTM C639
Tack-free Time	10~15 mins	
Extrusion Rate	60 ml/min	ASTM C603
Curing Speed	3-5 mm/day	
Working Time	5 mins	
Application Temperature	4°C to 40°C	
Curing Time	48 hours	
Specific Gravity	1.35-1.5g/cm³	
Uncured-As tested at 50% RH and 23°C		
Durometer Hardness,Shore A	65± 5	
Ultimate Tensile Strength	≥10 Mpa	ASTM D412
Elongation at Break	≥600%	
Temperature Resistance	-30°C to 90°C	



NICE - RTV



DESCRIPTION

NICE RTV silicone is a versatile compound that can be used in many ways, in a variety of industries. This versatility makes RTV silicone convenient to use. You see RTV silicone used in construction and automotive maintenance, as well as theatre and at-home projects.

APPLICATIONS

Bonding,sealing,insulating,moisture-proof and shock-proof material.

COLOURS

Clear, white, black, grey ,red or other colours.

PACKAGE&SIZE

32g/pc,45g/pc,86g/pc,144pcs/carton(12pcs/box,12boxes/carton).
OEM packaging availble.

STORAGE AND SHELF LIFE

When stored at 25°C or lower temperature in the original unopened container, RTV has a shelf life of 12 months from the date of manufacture.

TYPICAL PROPERTIES

These values are for reference only and are not intended for use in preparing specifications.

Uncured-As tested at 50% RH and 23°C		
Density(G/CM³)	1.0 ± 0.05	GBT 13477.5-2002
Viscosity(MPA/S)	10000-50000	GB/T2794-1995
Surface drying time(MIN)	3-10 mins	GB/T13477.5-2002
Full curing time(DAY)	2-4 days	GB/T13477.5-2002
Uncured-As tested at 50% RH and 23°C		
Bond streneth (MPA)	>1.0	GB/T528-2009
Elongation at break (%)	>150	GB/T528-2009
Shear strength(MPA)	>1.0(L-L)	GB/T11211-2009
Volume resistivity (Q.cm3)	1.41*1014	GB/T1692-2008
Durometer Hardness,Shore A	20-30	GB/T531.1-2008
Breakdown strength(KV/MM)	16	GB/T1695-2007
Dielectric constant(60HZ)	182.210%	
Temperature Resistance	-50°C to 200°C	







Shandong Nice Building Materials CO.,Ltd.

CUSTOMERS VISITING





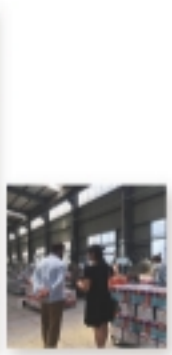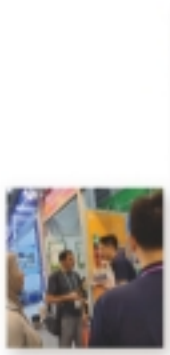



















CONTACT US

Weifang · China

Add:Dongyang Road, Dongcheng District, Linqu, Weifang City, China

Tel:+86 13081663765

Email: manager001@chinabuildingmaterials.net

www.chinabuildingmaterials.net

view electronic version