CLASSIC®
LIGHT

Mini Tri-Proof light Fixture Can connected

INSTRUCTIONS FOR USE LED TECHNOLOGY


WARNING:

- Please install strictly in accordance with the instructions. Improper installation may lead to accidents such as the lamp falling and electric shock.
- Do not randomly modify or replace lamp components to avoid causing damage, falling, electric shock and other accidents.
- Be sure to cut off the power supply before installation to prevent electric shock.

Precautions:

- The installation of the lamps should be carried out by qualified installers, following safety principles.
- The power supply and voltage range should be within the specified scope (180 - 265V~, 50/60Hz). Exceeding this voltage range may cause premature damage to the lamps.
- Do not install on high - temperature objects, nor above stoves, gas appliances, and vents to avoid damage.
- Ambient temperature: -10°C~ +40°C; Protection level: Ip20.
- Lamps can be connected in series - up to 10 lamps can be connected to each power point.


Installation method:

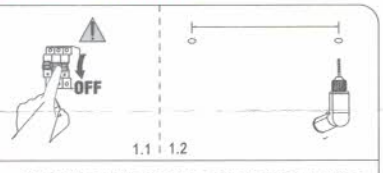


A 1.1. Make sure to cut off the power before installation, to prevent electric shock.
1.2. Mark the position and drill holes.



B Fix the mounting supports with the screws.

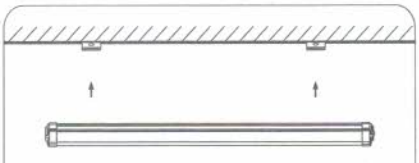


C Press the light into the supports.

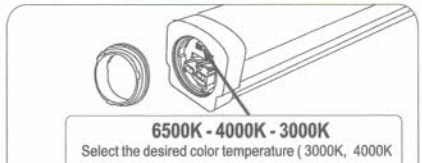


6500K - 4000K - 3000K
Select the desired color temperature (3000K, 4000K or 6500K) on the 3CCT switch at the product end.

D Cut off the power supply and unscrew the connecting nut.

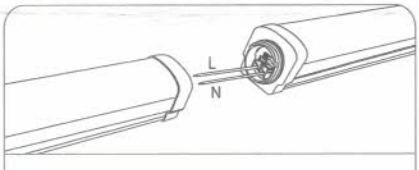

E Thread the cable through the clip according to the markings.

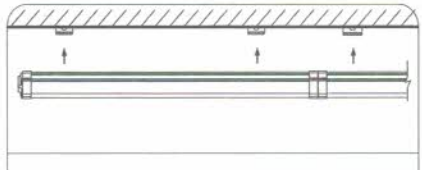

F Lamps can be connected in series - up to 10 lamps can be connected to each power point.

1 1 2 3 0 6 0 0

IP65 LED CE RoHS COMPLIANT